

DS-QAE0330G1T-V
30W Analog Horn Speaker



- 34-core 2-inch mid-to-high (dome resin film)
- Rated Power: 70 V: 2.5 W/5 W/7.5 W/15 W/30 W, 100 V: 5 W/10 W/15 W/30 W
- Sensitivity(1 m, 1 W): 108 dB $\pm$ 3 dB
- Max. SPL: 120 dB
- Frequency Response: 250 Hz to 8 kHz
- White


▪ Specification

Model		DS-QAE0330G1T-V
Speaker	Rated Power	70V: 2.5W/5W/7.5W/15W/30W; 100V: 5W/10W/15W/30W
	Max. Acoustic Pressure	120 dBSPL
	Sensitivity(1 m, 1 W)	108dB±3dB
	Frequency Response	250 Hz-8 kHz
	Speaker Unit	34-core 2-inch mid-to-high (dome resin film)
	Coverage Angle	Horizontal: 75° Vertical: 90°
General	Material	ABS
	Operating Temperature	-20 °C to 55 °C
	Operating Humidity	<90% (No condensation)
	Dimension	240mm × 220 mm × 165 mm
	Weight	Approx. 1.48 kg
	With Package Weight	Approx. 2.05 kg
	Color	White
	Packing List	Instructions × 1 Regulatory Compliance and Safety Information × 1
Approval	Protection	IP65

▪ Available Model

DS-QAE0330G1T-V

▪ Dimension

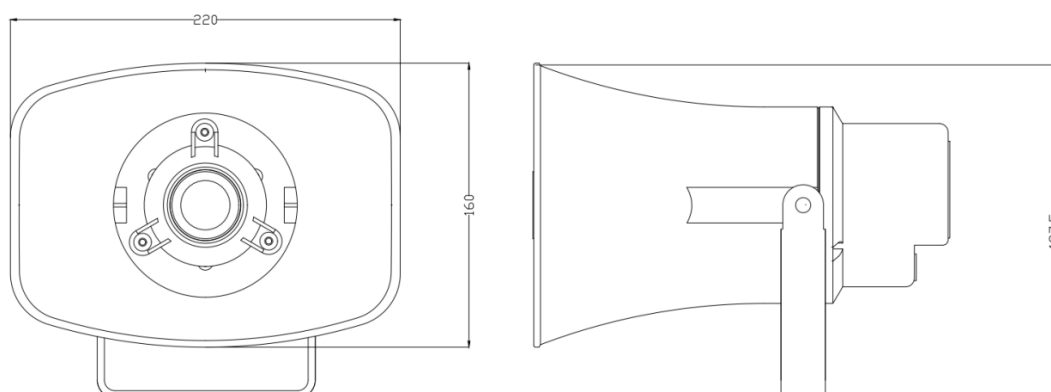

See Far, Go Further



www.hikvision.com
support@hikvision.com

